

MANUAL INSTALLATION

EXTERNAL HALYARD SYST.

COMPONENTS

- 1x quick link;
- 1x pulley;
- 2x 3/16" Stainless steel carabiners;
- 1x UHMW rope stopper;
- 1x oval aluminium ring;
- 1x cleat and 2x screws;
- 1x Nylon 1/4" halyard.

NOTE : The length of the halyard should be in accordance with the height of the flagpole.

ASSEMBLY


1. Attach the pulley with the quick link to the eyebolt at the top of your flagpole;
2. Install the cleat at the bottom of your pole, approximately 36" to 48" from the ground;
3. Measure the distance between the pulley and the cleat;
4. Double this length to allow for the halyard's outward and return path;
5. Allow an additional 3'L of the halyard;
6. Install your halyard in the pulley;
7. Install the UHMW piece to secure the halyard at the top, to stop at the pulley;
8. Use the oval aluminum ring to pass the top / bottom ropes;
9. With the ends of the halyard, tie a standard knot to secure everything;
10. Attach the two carabiners using the technique shown;
11. Attach the halyard to the cleat, making a figure-8 with it.

FLAG SIZE VS STEM LENGTH

- Regular with a flag of 54"W x 36"H or 72"W x 36"H maximum.

OTHER OPTIONS

- Pole painting;
- Country flag / Custom flag.

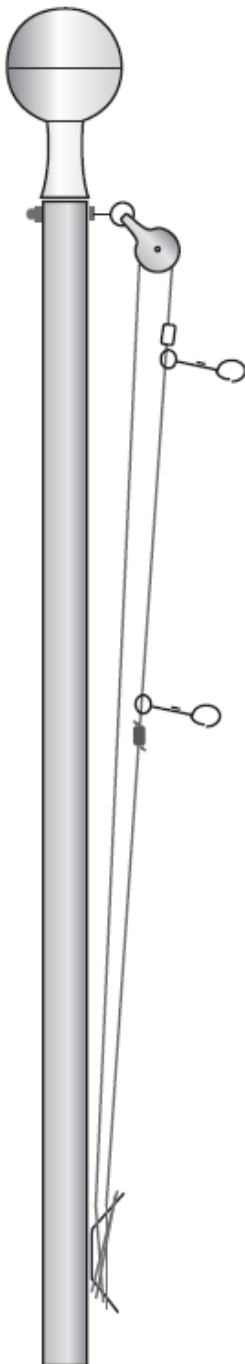

ASSEMBLY #10

