


REMOVABLE ROOF SUPPORT

WINDSOCK

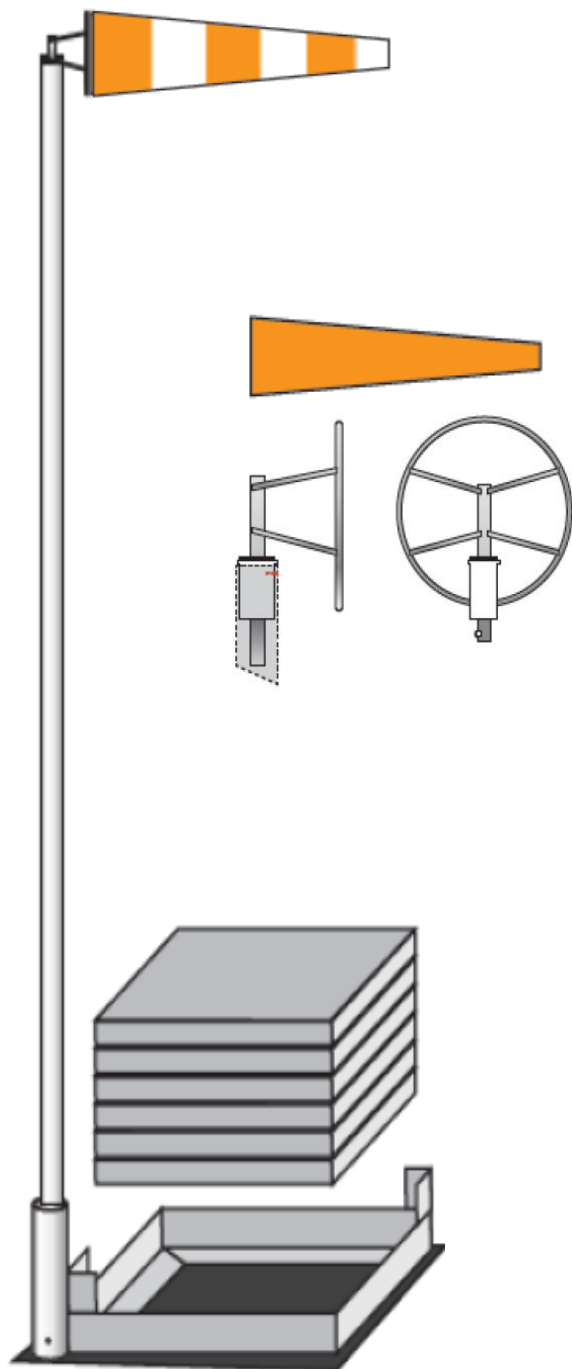

REMOVABLE ROOF SUPPORT

- 6061-T6, aluminum, welded
- 20" x 20" L-shaped frame, 3" x 2" x .156"
- 10"H x 2" C40 tube
- Stainless steel drum retaining bolt, 3/8-16" x 2.5"
- 24" x 24" rubber mat

NOTE: You will need 4 to 6 concrete slabs of 18" x 18" at 38 lbs each - minimum

SHAFT

- 6061-T6, aluminum pole of 2"D x 0.120"E x 10'H (maximum)

WINDSOCK BRACKET

- 1/4" welled Stainless steel
- 13"D or 18"D maximum, 3/4" Stainless steel, swivel
- 1.75" x 3.5" UHMW sleeve
- 2" x 1/4" UHMW washer

WINDSCOK

- 200D Solar Max DuPont Nylon
- 8"D x 5'L or 13"D x 5'L maximum
- Orange/White or Orange

WINDSOCK QUINCAILLERIE

- Stainless Steel

OTHER OPTIONS

- Concrete slab, 18" x 18", 37 lb
- Windsock – Orange/White or Orange